


EASYLINE_LED_U- D 15+10W NEUTRAL ANAGLYP...



EASYLINE LED UP/DOWN

SURFACE and PENDANT LUMINAIRES

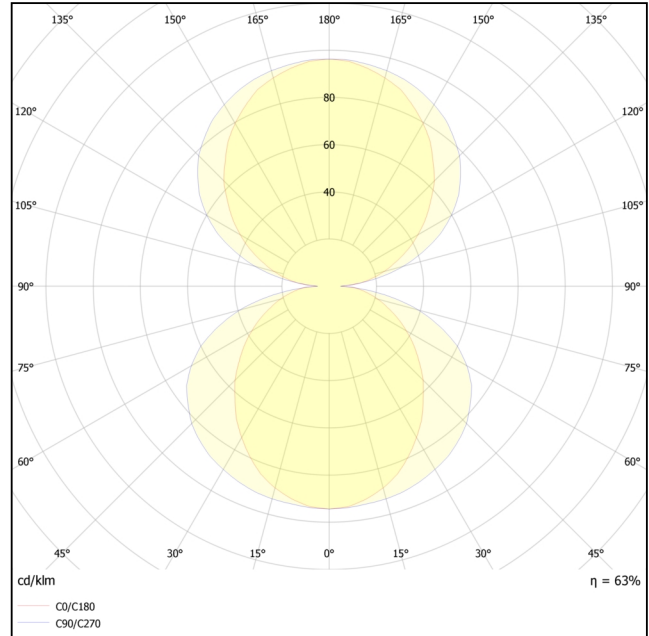

99231301_

Suspended

Dimensions: 870 x 62 x 120 mm

This luminaire combines the architectural style with the efficiency. It produces perfect lighting conditions without annoying reflections and that is why it can be used from entrance areas to offices.

The visual benefit: The continuous-row system is illuminated absolutely uniformly from beginning to end, is economically efficient, is maintenance-free and it has long service life. Technical Features

- Housing from aluminium profile, painted electrostatically in selected colour.

- PMMA diffuser in opal, microprismatic, microprismatic opal or anaglyph edition or blind aluminium cover painted.

- Removable plastic heads.

- Pure light without IR/UV radiation.

- Efficient thermal management.

- Up to 28W/m and 5000 Lm luminous flux range.

- UGR<19 at microprismatic and microprismatic opal versions:

Glare Evaluation: X=4H/ Y=8H S=0,25H, reflection factors 70/50/20.

For DSE work stations: $\gamma \geq 65^\circ < 3000\text{cd}/\text{m}^2$.

- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).

- Connection for operation on 230V-50/60Hz.

Upon request

- Connection for emergency lighting system, for one or three hours.

- Available with higher colour rendering index (CRI).

- Available in IP54 protection version.

IP 40

IK03

Equipment

1x LED

25W

4645lm

4000K

Petridis Lighting S.A.,
570 03 Agios Athanasios
Thessaloniki
Greece

+30 2310 408 700

thessaloniki@petridis-lighting.gr
<https://www.petridis-lighting.gr/>

Technical and design specifications subject to change without notice.

Created by
DIALux catalogue