


LINA_LED_1X15W_NEUTRAL_L66

0mm

LINA LED

LUMINAIRES with EXTRA PROTECTION

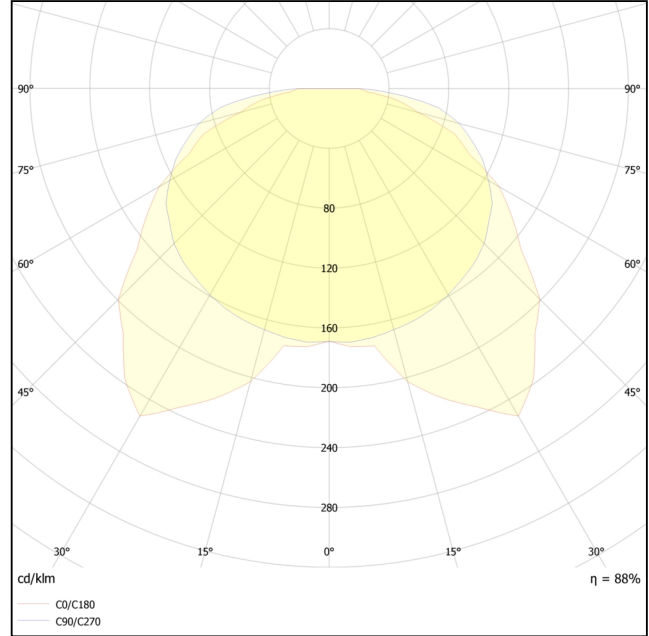

511813

Surface-mounted on ceiling

Dimensions: 660 x 100 x 110 mm

Technical Features

- Luminaires for Led lamp or Led modules version.
- Ecologic anti-aging injected sealing gasket.
- Gear-tray reflector unit in hot-galvanized steel, painted in white polyester, fixed to the housing by means of steel rapid devices, hinged opening.
- Snug fit snap-lock clips in polycarbonate for diffuser mounting.
- Stainless steel fixing brackets.
- Connection for operation on 230V-50Hz.
- Ra≥80, 3000K, 4000K.
- Led life time 50000h (L80B10).
- Driver life time 100000h.
- Colour tolerance: 3 MacAdam steps.

Upon request

- Connection for operation on 230V-50/60Hz with dimmer dali or 1-10VDC ballast.
- Connection for emergency lighting system, for one or three hours.

IP 66

IK10

Equipment

1x LED
15W
2931lm
4000K

Petridis Lighting S.A.,
570 03 Agios Athanasios
Thessaloniki
Greece

+30 2310 408 700

thessaloniki@petridis-lighting.gr
<https://www.petridis-lighting.gr/>

Technical and design specifications subject to change without notice.

Created by
DIALux catalogue